

Übergangsprofil Nr. 132, 38 mm


- Aluminium.
- Mittig versenkt gelocht.

Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)
Vorbehandlung:	E6 (DIN EN 17 611)
Schichtdicke Eloxal:	Klasse 15 (DIN EN 17 611)

Zubehör:	Befestigungsmaterial, farblich passend.
Geeignet für:	Textile und elastische Bodenbeläge
Montageart:	Schrauben
Längen:	500 cm, 300 cm, 270 cm, 100 cm, 90 cm
Farben:	gold, sahara, silber, bronze, Edelstahl matt, Edelstahl gebürstet

Übergangsprofile schaffen Übergänge zwischen nahezu beliebigen, gleichhohen Bodenbelägen.

Die in verschiedensten Breiten, Formen, Materialien und Farben erhältlichen Profile lassen sich schnell und unkompliziert verlegen.

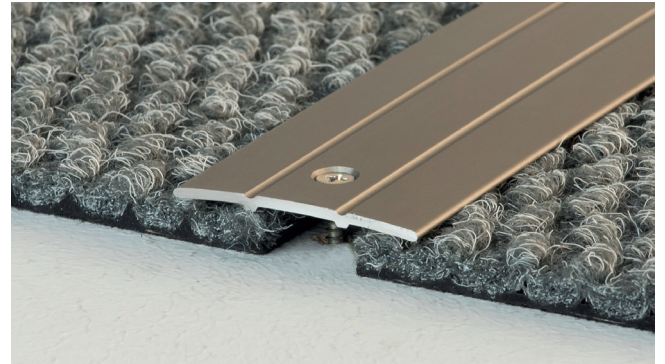

Connection section no. 132, 38 mm

- Aluminium.
- Centre countersunk holes.

Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)
Pre-treatment:	E6 (DIN EN 17 611)
Thickness of anodised layer:	Class 15 (DIN EN 17 611)

Accessories:	Fastening material in matching colors.
Suitable for:	Textile and elastic floor coverings
Installation:	screwing
Lengths:	500 cm, 300 cm, 270 cm, 100 cm, 90 cm
Colours:	gold, sahara, silver, bronze, stainless steel matt, stainless steel brushed

Connection sections create transitions between almost any level of flooring.

The profiles are available in a wide range of shapes, materials and colors and can be laid quickly and easily.