


Einschubprofil Nr. 211, 27 x 5,6 mm

- Aluminium.
- Für Belagstärken von 2,5 - 3 mm.
- Versenkte Schraublöcher.

Werkstoff:	EN AW 6063 (DIN EN 573)
Werkstoffzustand:	T6 (DIN EN 755-2)
Vorbehandlung:	E6 (DIN EN 17 611)
Schichtdicke Eloxal:	Klasse 15 (DIN EN 17 611)

Zubehör:	Befestigungsmaterial.
Geeignet für:	Designbelag / LVT Dryback, Textile und elastische Bodenbeläge
Montageart:	Schrauben
Länge:	250 cm
Farben:	silber, Edelstahl matt

Universalabschlussprofile sind für verschiedene Bodenbeläge, von nur 2 mm dünnen Designböden bis hin zu 22 mm starken Massivholzdielen, erhältlich und universell einsetzbar.

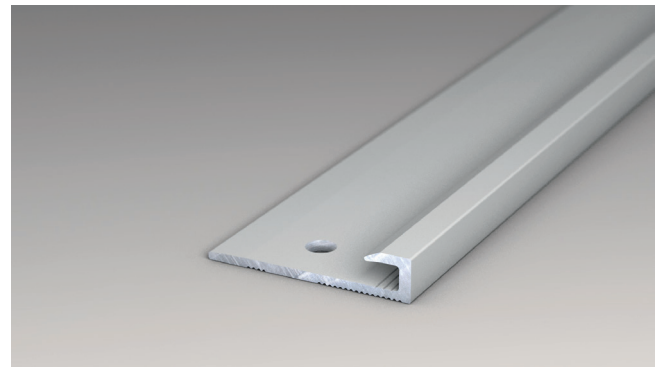

Border section no. 211, 27 x 5.6 mm

- Aluminium.
- For floor coverings 2.5 - 3 mm.
- Countersunk holes.

Material:	EN AW 6063 (DIN EN 573)
Material condition:	T6 (DIN EN 755-2)
Pre-treatment:	E6 (DIN EN 17 611)
Thickness of anodised layer:	Class 15 (DIN EN 17 611)

Accessories:	Fastening material.
Suitable for:	Design flooring / LVT dryback, Textile and elastic floor coverings
Installation:	screwing
Length:	250 cm
Colours:	silver, stainless steel matt

Universal edge sections are available for various floor coverings. They can be used with only 2 mm thin design floorings up to 22 mm thick solid wood flooring.